

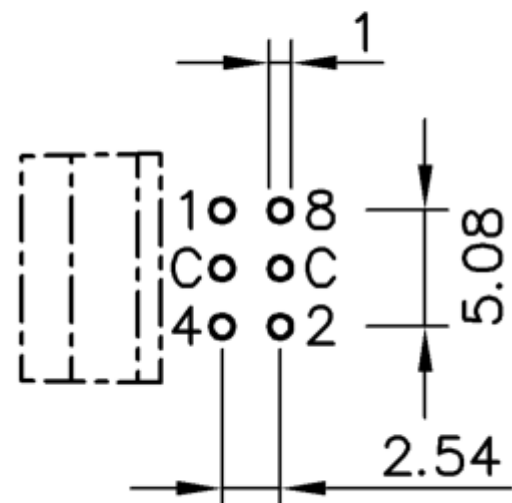


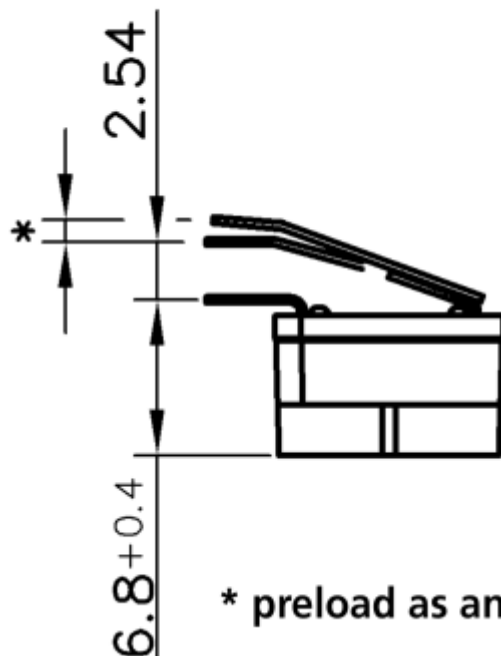

- Solid PCB pins
- Contacts with abrasion resistant hard gold plating
- Extra sealed design
- Switches are solder and flux sealed and washable
- Excellent detent, once more improved
- 100 % electronic inspection and testing

Solid PCB pins ensure trouble-free assembly and safe connection. Contacts with abrasion resistant hard gold plating have low and stable contact resistance. ISO 9001 approved production together with 100% electronic final inspection and testing guarantee reliable operation. Figures are clearly visible and detention mechanism is precise for fast and easy operation. Many special designs are available on request or can be built according to customer's specification.

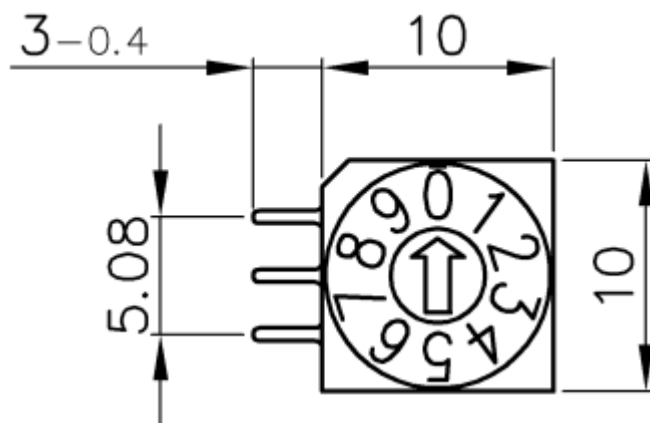

* preload as an assembly support

Mechanical Data		Electrical Data	
Type	vertical		
Fixation mode	THT		
Height	10.0 mm		
Length	9.34 mm		
Width	10.0 mm		
Pin connection	3+3		
Torque	(typically) 1.7 Ncm		
Mechanical lifetime	30.000 steps		
Positions per rotation	10 16 - more versions on request		
Perm. ambient temperature	-40 °C ... +85 °C		
Perm. storage temperature	-40 °C ... +85 °C		
Degree of protection	comparable IP67		
Sealing	O-Ring		
Humidity	21 days at 40 °C, 93 %RH		
Sinus-vibration testing	acc. IEC 68-2-6		
Frequency range	10 Hz ... 500 Hz ... 10 Hz, sliding		
Amplitude	6.0 mm		
Acceleration	10.0 g		
Shock testing	acc. IEC 68-2-27		
Shock acceleration amplitude	50.0 g		
Duration of nominal shock	11.0 ms		
Directions	6 (±x, ±y, ±z) 3 times each		
Wave soldering	Double Wave acc. DIN EN 61760-1:2006		
Iron soldering	2 s / 340 °C		

Mechanical Data

Electrical Data

Operating voltage	$\leq 42.0 \text{ V}$
Standby current	$\leq 0.2 \text{ A}$
Contact load, dynamic	$\leq 0.15 \text{ A}$
Minimum load	$1.0 \mu\text{A}$ 20.0 mVDC
Test voltage	250.0 V 50 Hz / 1.0 min
Contact resistance	$< 80.0 \text{ m}\Omega$
Insulation resistance	$> 100.0 \text{ M}\Omega$